

## Swiss quality for

Railway technology  
Repair, maintenance, care  
Automotive  
Machine maintenance

---

## Product list

### Contents:

1. Product application areas	S. 2
2. Railway technology	
Wheel flange lubrication	S. 3
Rail side lubrication	S. 3
Top-of-rail care	S. 3
Rail points lubrication	S. 4
Repair, maintenance, care	S. 4
3. Cranes / conveyor technology	
Cranes	S. 5
Escalators	S. 6
4. Automotive	S. 7
5. Machine maintenance	S. 8



Environmental Impact: The products with our symbol guarantee biodegradability according to the latest European test methods.

# 1. Product application areas

	RailLub 30/05	RailLub 30/09	RailLub 30/15	RailLub 30/40	RailLub 35/09	RailLub 40/09	RailLub TS-1-1	RailLub TS-0-2	HeadLub	HeadLub TS-0-2	SwitchLub	TS-0-2	GearLub 60/00	Gear-RackLub	PasteLub 10/12	PasteLub 10/R	CeramLub 35/0	BSS Spray	Pantotec	Syntec DK	SyntLub K	SyntLub B	SyntLub 2031	SyntLub 2062	SyntLub 4000	
Wheel flange lubrication	✓	✓	✓	✓	✓	✓																				
Top-of-rail care, vehicle side							✓																			
Top-of-rail care, stationary								✓																		
Rail sides, vehicle side																										
Rail sides, stationary						✓	✓																			
Rail contact, point bracket									✓																✓	
Flaps, & rods, bulk transporter														✓												
Buffer															✓											
Contact wire, overhead wire icing																			✓							
Escalator chains																							✓	✓		
Crane										✓	✓															
Wire ropes																				✓						
Chains																				✓	✓	✓	✓			
Screwed exhaust fittings																✓	✓	✓								
Brake shoes, brake pads																✓	✓	✓								
Brake jaws													✓		✓	✓	✓									
Springs, suspension															✓	✓	✓									
Wheel bolts															✓	✓	✓									
Spark plug thread															✓	✓	✓									
Windlasses															✓											
Bolts														✓		✓	✓	✓		✓	✓	✓				
Brake rod														✓		✓	✓									
Sockets														✓												
Rotary hearth furnace															✓											
Rotary turret/tower drive															✓											
Linked joints															✓											
open joints																				✓	✓					
Gears									✓	✓																
Converter drive																✓										
Steering linkage, rod																✓	✓									
Screw connections																✓	✓	✓								
Stone crusher conveyor belts																✓										
Adjusting screws / set screws																✓	✓									
Fuel nozzles																✓	✓	✓								
Roll pin																✓	✓	✓								
Shafts																✓	✓									
Crown gears									✓	✓																
Gear wheels									✓	✓						✓	✓									
Cement plants																✓										












<b>Areas</b>
<b>Railway technology</b>
<b>Cranes/conveyor technologie</b>
<b>Automotive</b>
<b>Machine maintenance</b>
<b>Industrie</b>

FW 27/09 © igralub.ag













IGRALUB AG für Schmiertechnik  
Mainaustrasse 15  
8008 Zürich  
Tel. +41 44 422 0002  
Fax +41 44 422 0003  
www.igralub.ch  
info@igralub.ch

IGRALUB AFRICA (PTY) LTD  
14/16 Spence Street,  
Duncanville,  
Ext. 3 Vereeniging  
1939 South Africa  
Tel. +27 (0)728 126 000  
info@igralub-africa.com  
www.igralub-africa.com

Product description	Proper-ties	Art. No.	Container
  <b>Wheel flange lubrication</b>		<b>vehicle side</b>	
<b>RailLub 30/05 High-Tech wheel flange lubricant, thixotropic.</b> Reduces the wear on the rails and the wheel flange of the vehicle. Does not bind any dust, brake wear particles or other impurities. Is winter-resistant and can be applied down to -25°C. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	521.10 521.25 521.50	10 kg Pail 25 kg Pail 50 kg Tonnelet
<b>RailLub 30/09 High-Tech wheel flange lubricant, thixotropic.</b> Corresponds to RailLub 30/05, has higher solid lubricant content. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	504.10 504.25 504.50 504.64	10 kg Pail 25 kg Pail 50 kg Tonnelet 220 kg Barrel
<b>RailLub 30/15 High-Tech wheel flange lubricant, thixotropic.</b> Corresponds to RailLub 30/09, has higher solid lubricant content. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	502.10 502.25	10 kg Pail 25 kg Pail
<b>RailLub 30/40 High-Tech Wheel flange lubricant for the lowest temperature range.</b> Liquid. Extremely resistant to cold can be applied down to -40°C. Corresponds to the 30 series, has low solid lubricant content Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	519.60	<b>180</b> kg Barrel
<b>RailLub 35/09 High-Tech wheel flange lubricant, paste.</b> Combination of white, ceramic solid lubricant and a synthetic carrier. Reduces noise and wear in rail vehicles. Treating no dust, brake wear particles or other impurities. Does not bind any dust, brake wear particles or other impurities. Is winter-resistant and can be applied down to -25°C Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>NLGI 00</b>	514.10 514.25	10 kg Pail 25 kg Pail
<b>RailLub 40/09 High-Tech mineral oil wheel flange lubricant, thixotropic.</b> Combination of chemically treated solid lubricants and a solvent-free, special mineral oil fraction as carrier. Higher protection against corrosion, even in extreme conditions. Prevents spin-off and pollution, even at high speeds. Significantly reduces wear and noise.	<b>&gt;NLGI 000</b>	516.25 516.50	25 kg Pail 50 kg Tonnelet
 <b>Rail side lubrication</b>		<b>stationary</b>	
<b>RailLub TS-1-1 Rail side lubricant for stationary installations, paste.</b> From chemically treated, synergistically acting solid lubricants. Thanks to the exceptional adhesion, the wheels distribute a long-lasting, thin film. Binding together with dirt and dust is excluded. Rail squeak on bends prevented in combination with HeadLub. Carrier liquid: 98 % degradable CEC-L-33-A-93.	 <b>NLGI 1</b>	535.25 535.62	25 kg Pail 200 kg Barrel
 <b>Top-of-rail care</b>		<b>vehicle side &amp; stationary</b>	
<b>HeadLub High-Tech top-of-rail treatment against rail squeak on bends,</b> free flowing grease. High-pressure lubricant compound contains selective, chemically treated solid lubricants. Affinity (inclination), and polar carrier accelerate the surface smoothing between the rail head and the wheel surface. Wear and abrasion are reduced to a minimum. Immediately reduces rail squeak on bends. Carrier liquid: 98 % degradable CEC-L-33-A-93.	 <b>NLGI 0</b>	505.05 505.10 505.62	5 kg Pail 10 kg Pail 200 kg Barrel
<b>HeadLub TS-0-2 High-Tech top-of-rail care for stationary systems, paste.</b> Combination of synthetic esters, fatty soaps, solid lubricants and additives. Its properties accelerate the wear surface smoothing between rail head and wheel surface with a thin film over long distances. This reduces the wear to a minimum prevents rail squeak on bends..	<b>NLGI 0</b>	529.05 529.10 529.25 529.62	5 kg Pail 10 kg Pail 25 kg Pail 200 kg Barrel
<b>RailLub TS-0-2 High-Tech top-of-rail care for stationary systems, paste.</b> Consists of synthetic esters, fatty soaps, solid lubricants and additives. Its properties accelerate the surface smoothing between the rail head and the wheel surface, thereby reducing wear to a minimum and preventing rail squeak on bends. Thanks to its adhesive qualities, a thin, long-lasting film is distributed over long distances.	<b>NLGI 0</b>	539.25 539.62	25 kg Pail 200 kg Barrel



FW27/09 © igralub ag

Product description		Proper-ties	Art. No.	Container
 <h3 style="color: green;">Rail points care</h3>				
<p><b>SwitchLub 60/00</b> lubricant for rail points, paste.</p> <p>Is combined from chemically treated solid lubricants and solvent-free, synthetic carriers. Reduces the sliding friction occurring between the rail contact and the point brackets in rail vehicles, and significantly reduces the wear. Is winter-resistant and can be applied down to -30°C is possible. Carrier liquid: 95 % degradable CEC-L-33-A-93.</p>		 <b>NLGI 1</b>	508.05 508.10 508.25	5 kg Pail 10 kg Pail 25 kg Pail
<p><b>SyntLub 4000</b> Lubricant for tram rail points, liquid.</p> <p>Excellent capillary effect, easily penetrating into the pores. Contains corrosion protection and special, water-repellent high-pressure additives. Heat resistance -40°C to +18°C, can be applied down to -25°C. Heat-resistant lubrication of electrically heated point systems. Carrier liquid: 90 % degradable CEC-L-33-A-93.</p>		 <b>NLGI 1</b>	622.25 622.61	25 kg Pail 190 kg Barrel
 <h3 style="color: green;">Repair, maintenance, care</h3>				
<p><b>Pantotec DK</b> Contact wire anti-freeze agent, liquid.</p> <p>Is a mixture of glycols, polymers and additives. Does not form gummy deposits on the contact wire. In winter, prevents the icing of the contact wire for trams and other rail vehicles with overhead lines. Pantotec DK is accurately sprayed on using a contact wire de-icing system (organised by Igralub). The individual components are bio-degradable.</p>		 <b>NLGI 1</b>	814.25	25 kg Pail
<p><b>PasteLub 10/R</b> Strongly adhesive special lubricant, paste.</p> <p>Made from synthetic esters, polymer solid lubricants and additives. Free of lead, chlorine, sulphur, phosphorus, mineral oil rape oil. Solid lubricant proportion is 25%. Hardly washes off in washing stations. Considerably reduces the friction losses occurring at extreme pressure loads and the material wear. Is very suitable for use on buffers. Remains functional from -40°C to +150°C.</p>		 <b>NLGI 0</b>	513.05 513.10	5 kg Pail 10 kg Pail
<p><b>PasteLub 10/12</b> Fitting and release paste, soft grease.</p> <p>Release agent and lubricant on a metal basis developed according to the latest findings in the tribology. Protects against corrosion, water-repellent, pressure-resistant, does not become gummy, and reduces wear. Dismantling of treated parts is possible, even after many years <b>Is listed as Substance No. SAP 744132 by the DB German railway.</b> Carrier liquid: 95 % degradable CEC-L-33-A-93.</p>		 <b>NLGI 2</b>	505.05 505.10 505.62	5 kg Pail 10 kg Pail 200 kg Barrel
<p><b>Gear-RackLub</b> Lubricant for open gears and crown gears, paste.</p> <p>Is a combination of chemically treated solid lubricants and a solvent-free, synthetic carrier. Reduces the roll and slide friction between the gear wheels in the operation of cranes and rail vehicles. Significantly reduces the wear. Carrier liquid: 95 % degradable CEC-L-33-A-93.</p>		 <b>NLGI 00</b>	507.10	10 kg Pail
<p><b>SyntLub B</b> Universal lubricant, liquid.</p> <p>Excellent capillary effect, penetrates easily into the pores of the metal surface and forms a barely measurable separating film. Good creep properties. Contains corrosion protection and high-pressure additives, heat resistance -45°C to +160°C. For the lubrication of all movable parts, joints, bolts, chains, etc. Carrier liquid: 87 % degradable CEC-L-33-A-93.</p>		 <b>NLGI 1</b>	611.62	200 kg Barrel
<p><b>BSS Brake Service Spray</b> for disc and drum brakes.</p> <p>High performance release agent on a metallic basis to reduce brake dust and to extend the service life. Prevents sticking and/or baking of the brake shoes or pads. Jamming of the brake jaws and brake squeak is eliminated. Uneven wear is prevented. Braking reliability is increased. Facilitates dismantling.</p>		<b>Aerosol</b>	506.74	400 ml Spray
<p><b>CeramLub 35/0</b> Fitting &amp; release paste for high temperatures, paste.</p> <p>Has a separating effect as an anti-bake paste and is used for all metallic materials. For the springs, the mounting and lubrication of cylinders, sockets, fitted and pressure seats, gears, shafts, bolts, Bowden cables, brake and steering rods, brake cylinders, brake jaws, brake saddles, spark plug threads, exhaust fittings, screws, wheel bolts, etc.</p>		 <b>NLGI 2</b>	515.05 515.10 515.25 515.64	5 kg Pail 10 kg Pail 25 kg Pail 220 kg Barrel
<p><b>CeramLub purple</b> High-temperature ceramic paste for brake systems. Fitting &amp; release paste.</p> <p>Includes solid lubricants on a ceramic basis, which prevent tribo-corrosion and produces an outstanding separation efficiency up to 1,600°C. Contains no electrochemically active metals, and can therefore be used for metallic materials. In automotive technology, the paste is used for the rear side of brake linings. Avoids overheating and therefore the seizing of the linings, while simultaneously, lubricating their guide in the brake jaws. <b>Bendix used CeramLub purple worldwide for their brake linings.</b></p>		<b>NLGI 2</b>	517.05 517.10 517.62 517.80	5 kg Pail 10 kg Pail 200 kg Barrel 200 ml Spray with brush adapter


### 3. Cranes-/ Conveyor technique

Product description	Properties	Art. No.	Container
 <b>Cranes</b>			
<b>Gear-RackLub</b> Lubricant for open gears and crown gears, paste. Is a combination of chemically treated solid lubricants and a solvent-free, synthetic carrier. Reduces then roll and slide friction between the gear wheels in the operation of cranes and rail vehicles. Significantly reduces the wear. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>NLGI 00</b>	507.10	10 kg Pail
<b>GearLub</b> Wheel flange fluid grease for crane tracks & wheels, free-flowing paste. Reduces the roll and sliding friction between wheel and rail that occurs under high-pressure loadings. The wear is significantly reduced. The specially selected solid lubricant combination enables the transfer of a thin lubricant and separation film between the friction parties. Free of solvents.		524.10	10 kg Pail
<b>PasteLub 10/R</b> Strongly adhesive special lubricant, paste. Made from synthetic esters, polymer solid lubricants and additives. Free of lead, chlorine, sulfur, phosphorus, mineral oil rape oil. Solid lubricant proportion is 25%. Hardly washes off in washing stations. Considerably reduces the friction losses occurring at extreme pressure loads and the material wear. Is very suitable for use on buffers. Remains functional from -40 °C to +150 °C.	 <b>NLGI 0</b>	513.05 513.10	5 kg Pail 10 kg Pail
<b>PasteLub 10/12</b> Fitting and release paste, soft grease. Release agent and lubricant on a metal basis developed according to the latest findings in the tribology. Dismantling of treated parts is possible, even after many years <b>Is listed as Substance No. SAP 744132 by the DB German railway.</b> Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>NLGI 2</b>	505.05 505.10 505.62	5 kg Pail 10 kg Pail 200 kg Barrel
<b>RailLub 30/05</b> High-Tech wheel flange lubricant, thixotropic. Reduces the wear on the rails and the wheel flange of the vehicle. Does not bind any dust, brake wear particles or other impurities. Is winter-resistant and can be applied down to -25 °C. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	521.10 521.25 521.50	10 kg Pail 25 kg Pail 50 kg Tonnelet
<b>RailLub 30/09</b> High-Tech wheel flange lubricant, thixotropic. Corresponds to RailLub 30/05, has higher solid lubricant content. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	504.10 504.25 504.50 504.64	10 kg Pail 25 kg Pail 50 kg Tonnelet 220 kg Barrel
<b>RailLub 30/15</b> High-Tech wheel flange lubricant, thixotropic. Corresponds to RailLub 30/09, has higher solid lubricant content. Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>&gt;NLGI 000</b>	502.10 502.25	10 kg Pail 25 kg Pail
<b>RailLub 35/09</b> High-Tech wheel flange lubricant, paste. Combination of white, ceramic solid lubricant and a synthetic carrier. Reduces noise and wear in rail vehicles. Treating no dust, Bremsabriebpartikel or other impurities. Does not bind any dust, brake wear particles or other impurities. Is winter-resistant and can be applied down to -25 °C Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>NLGI 00</b>	514.10 514.25	10 kg Pail 25 kg Pail
<b>RailLub 40/09</b> High-Tech mineral oil wheel flange lubricant, thixotropic. Combination of chemically treated solid lubricants and a solvent-free, special mineral oil fraction as carrier. Higher protection against corrosion, even in extreme conditions. Significantly reduces wear.	 <b>&gt;NLGI 000</b>	516.25 516.50	25 kg Pail 50 kg Tonnelet
<b>CeramLub 35/0</b> Fitting & release paste for high temperatures, paste. Has an separating effect as an anti-bake paste and is used for all metallic materials. For the springs, the mounting and lubrication of cylinders, sockets, fitted and pressure seats, gears, shafts, bolts, Bowden cables, brake and steering rods, brake cylinders, brake jaws, brake saddles, spark plug threads, exhaust fittings, screws, wheel bolts, etc.	 <b>NLGI 2</b>	515.05 515.10 515.25 515.64	5 kg Pail 10 kg Pail 25 kg Pail 220 kg Barrel
<b>CeramLub purple</b> High-temperature caramic paste for brake systems. <b>Fitting &amp; release paste.</b> Includes solid lubricants on a ceramic basis, which prevent tribocorrosion and produces an outstanding separation efficiency up to 1,600 °C. Contains no electrochemically active metals, and can therefore be used for metallic materials. In automotive technology, the paste is used for the rear side of brake linings. Avoids overheating and therefore the seizing of the linings, while simultaneously, lubricating their guide in the brake jaws. <b>Bendix used CeramLub purple worldwide for their brake linings.</b>	 <b>NLGI 2</b>	517.05 517.10 517.62 517.80	5 kg Pail 10 kg Pail 200 kg Barrel 200 ml Spray with brush adapter

FW27/09 © igralub ag

Product description	Properties	Art. No.	Container
 <h2 style="color: green;">Escalators</h2>			
<p><b>SyntLub 2031 High-Tech lubricant for escalators, liquid.</b></p> <p>For all the moving parts, joints, bolts and chains of escalators in indoor and outdoor systems, and in particular in airports, subways, department stores, etc. Water-repellent, antistatic. Temperature range -30 °C to +230 °C. Carrier liquid: 85 % degradable CEC-L-33-A-93.</p>		<p>620.09    9 kg Pail</p> <p>620.25    25 kg Pail</p> <p>620.60    180 kg Barrel</p>	
<p><b>SyntLub 2062 High-Tech lubricant for chains and escalators, liquid.</b></p> <p>In chains, lubricates the small areas, such as rollers, pins, bushings and side plates, penetrates deep into the smallest gaps. Suitable for drive chains, transport chains etc. Stable under pressure and temperature. Easy to clean, does not harden and forms no crusts.</p>		621.20    20 kg Pail	

Visit us on the Internet, [www.igralub.ch](http://www.igralub.ch)  
[www.igralub-africa.com](http://www.igralub-africa.com)

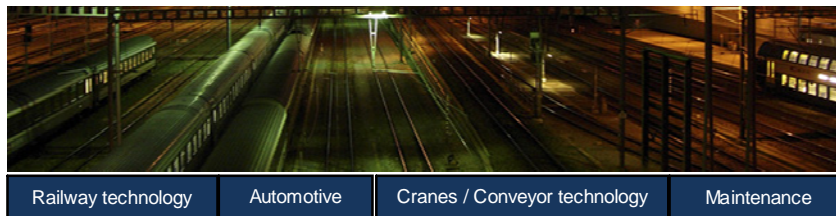

Renowned Swiss quality of lubrication & friction management



Home  
 Contact  
 References  
 Services



**Specialist for solid lubricants and lubrication systems in particular for:**

- Wheel flange and rail head lubrication
- Bogies and bolts for rail vehicles
- Break linkages, disk and drum brakes
- Open gearings Gear-rack lubrication
- Buffers, couplings and draft gears
- Hoists and cables
- Conveying chains and belts
- Escalators
- Track switches

**IGRALUB Africa (PTY) LTD**  
 14/16 Spence Street  
 Duncanville  
 Ext. 3 Vereeniging  
 1939 South Africa  
 Tel. +27 (0)728 126 000  
 E-Mail: [info@igralub-africa.com](mailto:info@igralub-africa.com)

[www.igralub.ch](http://www.igralub.ch)  
[www.igralub-asia.com](http://www.igralub-asia.com)  
[www.igralub.de](http://www.igralub.de)  
[www.automotive.com](http://www.automotive.com)

FW27/09 © igralub ag





Product description	Properties	Art. No.	Container
<b>Automotive</b>			
<b>BSS Brake Service Spray for disc and drum brakes.</b> High performance release agent on a metallic basis to reduce brake dust and to extend the service life. Prevents sticking and/or baking of the brake shoes or pads. Jamming of the brake jaws and brake squeak is eliminated. Uneven wear is prevented. Braking reliability is increased. Facilitates dismantling.	<b>Aerosol</b>	506.74	400 ml Spray
<b>CeramLub 35/0 Fitting &amp; release paste for high temperatures, paste.</b> Has an separating effect as an anti-bake paste and is used for all metallic materials. For the springs, the mounting and lubrication of cylinders, sockets, fitted and pressure seats, gears, shafts, bolts, Bowden cables, brake and steering rods, brake cylinders, brake jaws, brake saddles, spark plug threads, exhaust fittings, screws, wheel bolts, etc.	<b>NLGI 2</b>	515.05 515.10 515.25 515.64	5 kg Pail 10 kg Pail 25 kg Pail 220 kg Barrel
<b>CeramLub purple High-temperature ceramic paste for brake systems. Fitting &amp; release paste.</b> Includes solid lubricants on a ceramic basis, which prevent tribocorrosion and produces an outstanding separation efficiency up to 1,600 °C. Contains no electrochemically active metals, and can therefore be used for metallic materials. In automotive technology, the paste is used for the rear side of brake linings. Avoids overheating and therefore the seizing of the linings, while simultaneously, lubricating their guide in the brake jaws. <b>Bendix used CeramLub purple worldwide for their brake linings.</b>	<b>NLGI 2</b>	517.05 517.10 517.62 517.80	5 kg Pail 10 kg Pail 200 kg Barrel 200 ml Spray with Brush adapter
<b>PasteLub 10/12 Fitting and release paste, soft grease.</b> Release agent and lubricant on a metal basis developed according to the latest findings in the tribology. Protects against corrosion, water-repellant, pressure-resistant, does not become gummy, and reduces wear. Dismantling of treated parts is possible, even after many years <b>Is listed as Substance No. SAP 744132 by the DB German railway.</b> Carrier liquid: 95 % degradable CEC-L-33-A-93.	 <b>NLGI 2</b>	505.05 505.10 505.62	5 kg Pail 10 kg Pail 200 kg Barrel
<b>SyntLub B Universal lubricant, liquid.</b> Excellent capillary effect, penetrates easily into the pores of the metal surface and forms a barely measurable separating film. Good creep properties. Contains corrosion protection and high-pressure additives, heat resistance -45 °C to +160 °C. For the lubrication of all movable parts, joints, bolts, chains, etc. Carrier liquid: 87 % degradable CEC-L-33-A-93.		611.62 611.74	200 kg Barrel 400 ml Spray

### Explanation of symbols





 Bogies Vehicle on rails	 Tram rail Metro Vehicle on rails	 Top-of-rail Wheel flange Track	 Turnouts	 Automotive	 Escalators
 Crane	 Ketten	 Screw oprn joints Construction industrie	 Gear wheels Gears		



Tested according to the latest methods



## 5. Machine maintenance

Product description		Properties	Art. No.	Container
 <b>Industrie</b>				
<b>Gear-RackLub</b> Lubricant for open gears and crown gears, paste. Is a combination of chemically treated solid lubricants and a solvent-free, synthetic carrier. Reduces then roll and slide friction between the gear wheels in the operation of cranes and rail vehicles. Significantly reduces the wear. Carrier liquid: 95 % degradable CEC-L-33-A-93.			507.10	10 kg Pail
<b>GearLub</b> Wheel flange fluid grease for crane tracks & wheels, free-flowing paste. Reduces the roll and sliding friction between wheel and rail that occurs under high pressure loadings. The wear is significantly reduced. The specially selected solid lubricant combination enables the transfer of a thin lubricant and separation film between the friction parties. Free of solvents.			524.10	10 kg Pail
<b>CeramLub 35/0</b> Fitting & release paste for high temperatures, paste. Has an separating effect as an anti-bake paste and is used for all metallic materials. For the springs, the mounting and lubrication of cylinders, sockets, fitted and pressure seats, gears, shafts, bolts, Bowden cables, brake and steering rods, brake cylinders, brake jaws, brake saddles, spark plug threads, exhaust fittings, screws, wheel bolts, etc.		<b>NLGI 2</b>	515.05 515.10 515.25 515.64	5 kg Pail 10 kg Pail 25 kg Pail 220 kg Barrel
<b>CeramLub purple</b> High-temperature ceramic paste for brake systems. Fitting & release paste. Includes solid lubricants on a ceramic basis, which prevent tribocorrosion and produces an outstanding separation efficiency up to 1,600 °C. Contains no electrochemically active metals, and can therefore be used for metallic materials. In automotive technology, the paste is used for the rear side of brake linings. Avoids overheating and therefore the seizing of the linings, while simultaneously , lubricating their guide in the brake jaws. <b>Bendix used CeramLub purple worldwide for their brake linings.</b>		<b>NLGI 2</b>	517.05 517.10 517.62 517.80	5 kg Pail 10 kg Pail 200 kg Barrel 200 ml Spray with brush adapter
<b>PasteLub 10/R</b> Strongly adhesive special lubricant, paste. Made from synthetic esters, polymer solid lubricants and additives. Free of lead, chlorine, sulfur, phosphorus, mineral oil rape oil. Solid lubricant proportion is 25%. Hardly washes off in washing stations. Considerably reduces the friction losses occurring at extreme pressure loads and the material wear. Is very suitable for use on buffers. Remains functional from -40 °C to +150 °C.		<b>NLGI 0</b>	513.05 513.10	5 kg Pail 10 kg Pail
<b>PasteLub 10/12</b> Fitting and release paste, soft grease. Release agent and lubricant on a metal basis developed according to the latest findings in the tribology. Protects against corrosion, water-repellant, pressure-resistant, does not become gummy, and reduces wear. Dismantling of treated parts is possible, even after many years <b>Is listed as Substance No. SAP 744132 by the DB German railway.</b> Carrier liquid: 95 % degradable CEC-L-33-A-93.			505.05 505.10 505.62	5 kg Pail 10 kg Pail 200 kg Barrel
<b>SyntLub B</b> Universal lubricant, liquid. Excellent capillary effect, penetrates easily into the pores of the metal surface and forms a barely measurable separating film. Good creep properties. Contains corrosion protection and high-pressure additives, heat resistance -45 ° C to +160 ° C. For the lubrication of all movable parts, joints, bolts, chains, etc. Carrier liquid: 87 % degradable CEC-L-33-A-93.			611.62	200 kg Barrel
<b>SyntLub K</b> Schmierstoff für Drahtseilpflege, flüssig. Synthetic lubricant forms a transparent protective film, effective from -45 °C to +160 °C. For all the moving parts, joints, bolts, chains, etc. Releases resin, rust, prevents these and has a purifying effect. Penetrates into microscopic pores and cracks. Infiltrates water and forms a protective film against moisture. Has a high penetration, and is particularly suitable for small chains.			612.09 612.62	9 kg Pail 200 kg Barrel
<b>SyntLub 2062</b> High-Tech lubricant for chains and escalators, liquid. In chains, lubricates the small areas, such as rollers, pins, bushings and side plates. penetrates deep into the smallest gaps. Suitable for drive chains, transport chains etc. Stable under pressure and temperature. Easy to clean, does not hardened and forms no crusts.			621.20	20 kg Pail